

DELL[®] 5130 SERIES

EASY TO REMANUFACTURE CARTRIDGE INSTRUCTIONS



DELL 5130 SERIES TONER CARTRIDGE

REMANUFACTURING THE DELL 5130 SERIES TONER CARTRIDGE



By Mike Josiah and the Technical Staff at UniNet



The Dell 5130 Series cartridges are rated for 18,000 pages black and 12,000 pages color.

The OEM part numbers are 310-8092 Black, 310-8094 Cyan, 310-8096 Magenta, and 310-8098 Yellow.


There is a chip that must be replaced every cycle.

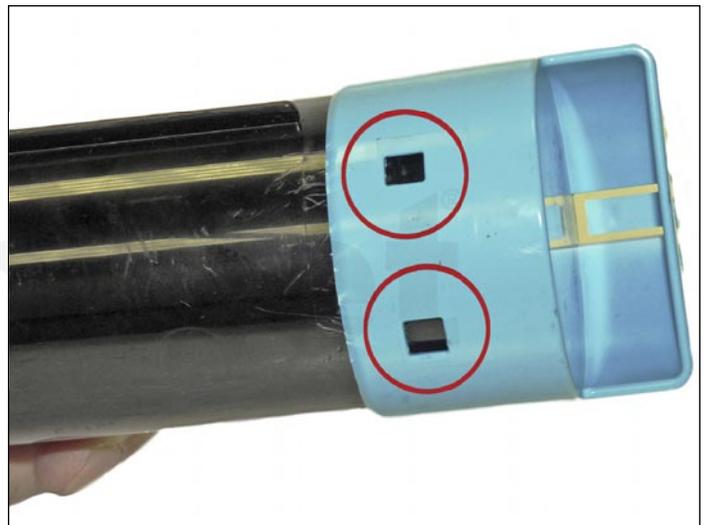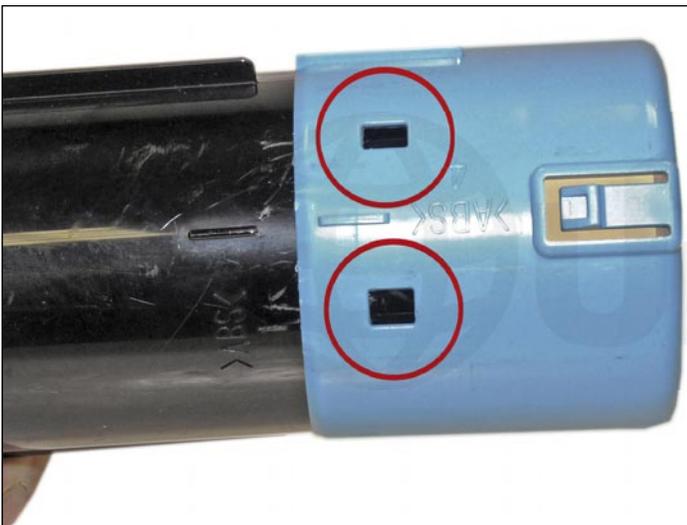


1. Pry up on the colored end cap by lifting up all four tabs.



2. Remove the colored end cap.

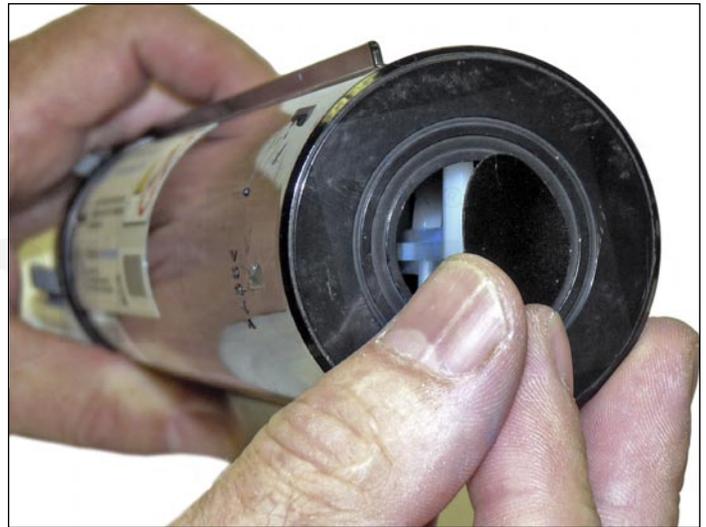

3. Remove the fill hole seal and place aside.

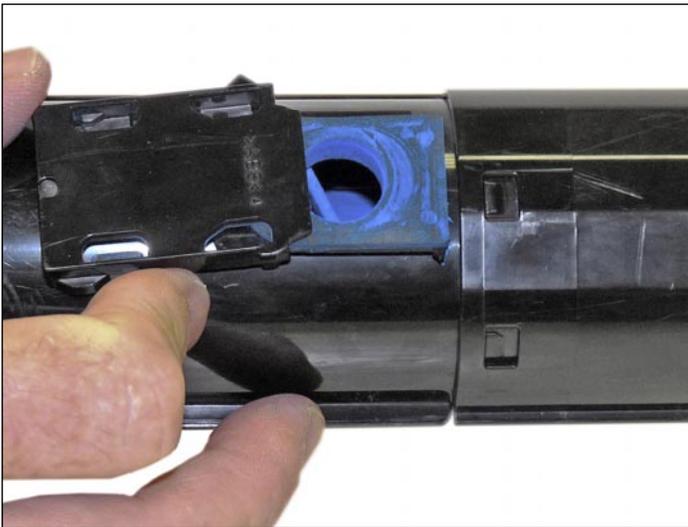

4. Open the toner port and clean out any remaining toner.

Close the toner port.






5. Fill the cartridge with toner for use in the Dell 5130. Replace the fill hole seal (as shown). If the seal is damaged or is leaking the seal for the Samsung CLP-300 can be used.



6. Align the two marks on the end cap and tube.

Install the end cap on the cartridge.

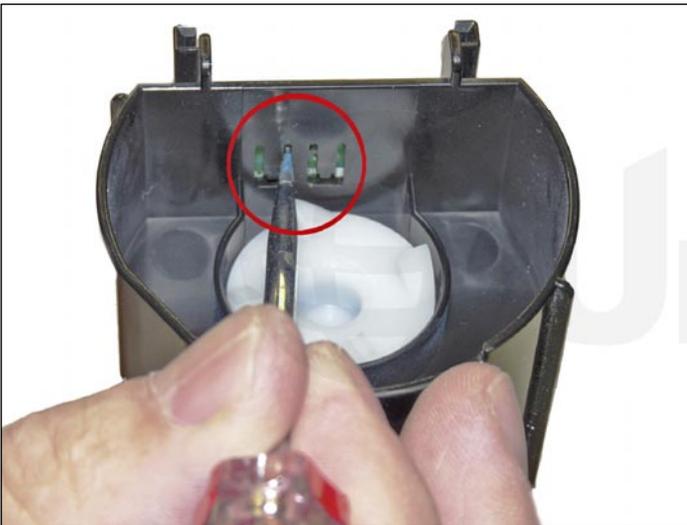

7. Using a small Jeweler's type screwdriver, pry up the chip through the small slots underneath and slide it out.

Replace the chip.

