

# KYOCERA® FS-9500

## EASY TO REMANUFACTURE CARTRIDGE INSTRUCTIONS



KYOCERA FS-9500 TONER CARTRIDGE

# REMANUFACTURING THE KYOCERA FS-9500 TONER CARTRIDGE

By Mike Josiah and the Technical Staff at UniNet



The Kyocera FS-9500 cartridges are rated for 20,000 pages. The OEM part number is TK-60.

There is NO chip used on this cartridge.



1. Remove the fill plug from the cartridge.


Clean out all the remaining toner.



2. Make sure the toner port is closed. If open, close the port by turning a tab on the gear with a screwdriver.



3. Fill the cartridge with toner for use in the TK-60 series of cartridges. Replace the fill plug.

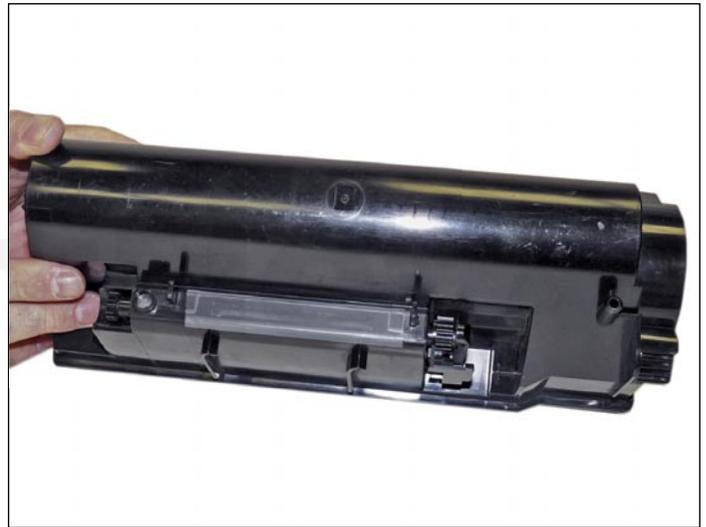

4. If shipping the cartridge, place a small strip of tape across the toner port.